

PCB Relay	G5LA
-----------	------

A Cubic, Single-pole 10A Power Relay



- Sub miniature “Sugar Cube ”relay with universal terminal footprint.
- Conforms to VDE0435,UL508,CSA22.2,CQC
- High switching power:10A 250VAC
- Withstands impulse of up to 4,500V
- Coil power consumption:360mW
- UL class-F insulation type also available
- Tracking resistance :CTI>250
- Contains no lead inside and features
- Cadmium-free contacts ensuring environment-friendly use

Ordering Information

Enclosure ratings	Contact form	Model number
Flux protection	SPDT	G5LA-1
		G5LA-1-CF
	SPST-NO	G5LA-1A
		G5LA-1A-CF
Fully sealed	SPDT	G5LA-14
		G5LA-14-CF
	SPST-NO	G5LA-1A4
		G5LA-1A4-CF

Note : When ordering, add the rated coil voltage to the model number.
Example: G5LA-1 12VDC

 Rated coil voltage

Model Number Legend

G5LA - - - - - - VDC
 1 2 3 4 5 6 7

- 1. Number of Poles
1: 1pole
- 2. Contact Form
None: SPDT
A: SPST-NO
- 3. Enclosure Ratings
None: flux protection
4: fully sealed
- 4. Contact Material
None: AgSnO2
- 5. Insulation System
None: Class A
CF : Class F
- 6. Coil Power Consumption
None: 360mW
- 7. Rated Coil Voltage
5, 9, 12, 24, 48 VDC

Specifications

■ Coil Ratings

Rated Voltage (V)	Rated current (mA)	Coil resistance (Ω)	Must operate voltage	Must release voltage	Rated power consumption (W)	Max voltage
DC5	72	69.4	75%max. of rated voltage	10%min. of rated voltage	Approx. 0.36	130% of rated voltage at 85°C 170% of rated voltage at 23°C
DC9	40	225				
DC12	30	400				
DC24	15	1600				
DC48	10	4800			Approx. 0.48	

(1) The value of above list is measured at ambient temperature 23°C with the tolerances of coil resistance $\pm 10\%$.

(2) The other items are value at 23°C .

Note: 1. Please avoid to do the ultrasonic cleaning, for this relay

Because there are afraid of open coil or contact sticking by the vibration of ultrasonic.

2. Please pay attention to the drop of relay

if you dropped the product on the floor, please avoid to use it on your unit

■ Contact Ratings

Load	Resistive load($\cos\Phi=1$)
Rated load	10A at 250VAC (N.O) 10A at 24VDC (N.O) 5A at 125VAC (N.O/N.C) 5A at 24VDC (N.O/N.C)
Rated carry current	10A(N.O) 5A(N.C)
Max. switching voltage	250VAC 24VDC
Max. switching current	AC10A DC10A(N.O) AC5A DC5A (N.C)
Max. switching power	AC2500VA DC240W(N.O) AC625VA DC120W(N.C)
Failure rate(reference value)	100mA at DC5V

Note: P level: $\lambda_{60} = 0.1 \times 10^{-6}/\text{operation}$

■ Characteristics

Contact resistance	100 m Ω max.
Operation time	10 ms max.
Release time	5 ms max.
Max. operating frequency	Mechanical: 18,000 operations/hr Electrical: 1,800 operations/hr(under rated load)
Insulation resistance	1,000 M Ω min. (at 500 VDC)
Dielectric strength	2,000 VAC. 1mA 50/60Hz for 1 min between coil and contacts 750 VAC 1mA 50/60Hz for 1 min between contacts of same polarity
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) Malfunction: 100 m/s ² when energized ; 100 m/s ² when no energized
Endurance	Mechanical: 10,000,000 operations min. (at 18,000 operations/hr under no load) Electrical: 100,000 operations average. (at 1,800 operations/hr under rated load)
Ambient temperature	Operating: -40°C to 85°C (with no icing) Storage: -40°C to 85°C (with no icing)

Ambient humidity	Operating: 35% to 85% Storage: 35% to 85%
Weight	Approx. 7.5g

Note: Values in the above table are the initial values.

■ Approved standards

UL508 (File No. E41643) & CSA C22.2 No. 14 (File No. LR31928)

Model	Coil rating	Contact rating
G5LA	5 to 48 VDC	NO: 10 A, 277 V ac, general use 15 A, 125 V ac, general use 10 A, 24 V dc, resistive 1/2 Hp, 125 V ac 1/2 Hp, 250 V ac 10 A, 277 V ac, general use, 85°C (-CF) NC: 10 A, 125 V ac, resistive

VDE0435(EN61810-1)

Model	Coil rating	Contact rating
G5LA	5 to 48 VDC	NO: 10 A, 250 V ac, resistive, 85°C - flux protection: 50,000 cycles - fully sealed: 10,000 cycles 12 A, 125 V ac, resistive, 85°C, 10,000 cycles CO: 5 A, 250 V ac, resistive, 85°C - flux protection: 50,000 cycles - fully sealed: 10,000 cycles

CQC

Model	Coil rating	Contact rating
G5LA	5 to 48 VDC	NO: 10 A, 250 V ac, resistive, 10,000 cycles 12 A, 120 V ac, resistive, 10,000 cycles

Dimensions

Note: All units are in millimeters unless otherwise indicated.




■ SPDT Models

Terminal
Arrangement/Internal
Connections (Bottom View)

Mounting Holes
(Bottom Views)
Tolerance: $\pm 0.1\text{mm}$
Unless specified

SPDT

SPDT

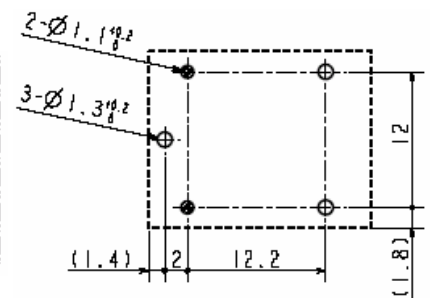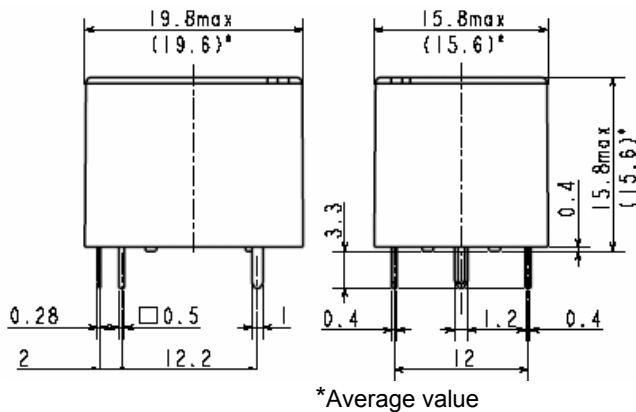

■ SPST Models

Terminal
Arrangement/Internal
Connections (Bottom View)

Mounting Holes
(Bottom Views)
Tolerance: $\pm 0.1\text{mm}$
Unless specified

SPST-NO

SPST-NO

